




POLARIS

Unserviceability Light




<p>Compliance to standards</p>	<p>ICAO: International Civil Aviation Organization, Aerodromes, Annex 14, Vol. 1</p> <p>EASA CS ADR-DSN.R.870 Unserviceable areas requirements</p> <p>IEC TS 61827: Electrical installations for lighting and beaconing of aerodromes. Characteristics of inset and elevated luminaires used on aerodromes and heliports</p>
<p>Application</p>	<p>An unserviceability light shall consist of a red fixed light. The light has an intensity sufficient to ensure conspicuity considering the intensity of the adjacent lights and the general level of illumination against which it would normally be viewed. The intensity is more than 10 cd of red light.</p>
<p>Features</p>	<p>The light unit is lightweight, durable, waterproof and has been developed for fast deployment by non-skilled operators and will operate in the worst environmental conditions.</p> <p>All the units are equipped with high power LEDs, matched by dedicated optics to drastically increase photometric performances, save on power consumption and reduce life cycle costs.</p> <p>Autonomy up to 12 nights.</p>
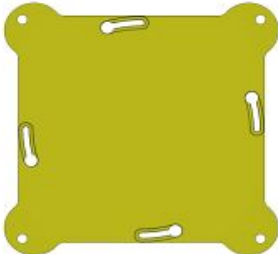
<p>Product Code</p>	<p>AL - 117 - 01 - RE</p> <p>Series Indicator (Airfield Lighting) AL Product Indicator 117 LEDs Number 01 LEDs Light Colour (red) RE</p>
<p>Description</p>	<p>Housing - powder coated aluminium RAL 1004 (aviation yellow) </p> <p>Dispenser - clear polycarbonate UV resistant</p> <p>Cable gland - nickel plated brass</p> <p>Fasteners - stainless steel</p> <p>Casing - polycarbonate UV resistant</p> <p>Carrying handle - aluminum</p>
<p>Environment</p>	<p>Temperature range: -20° to +50° Degree of protection: IP 65 Ka tested: Salt mist</p>
<p>Mounting</p>	<p>1. Polaris Solar panel stand AL-123-AX</p>  <p>2. Polaris base plate AL-124-AX</p> 

Electrical Characteristics

Power consumption: 1W

Power supply: Power supply is provided by 1 rechargeable deep cycle sealed lead acid battery 12V - 12Ah (optional different battery can be used)
 User-replaceable
 Air transportable

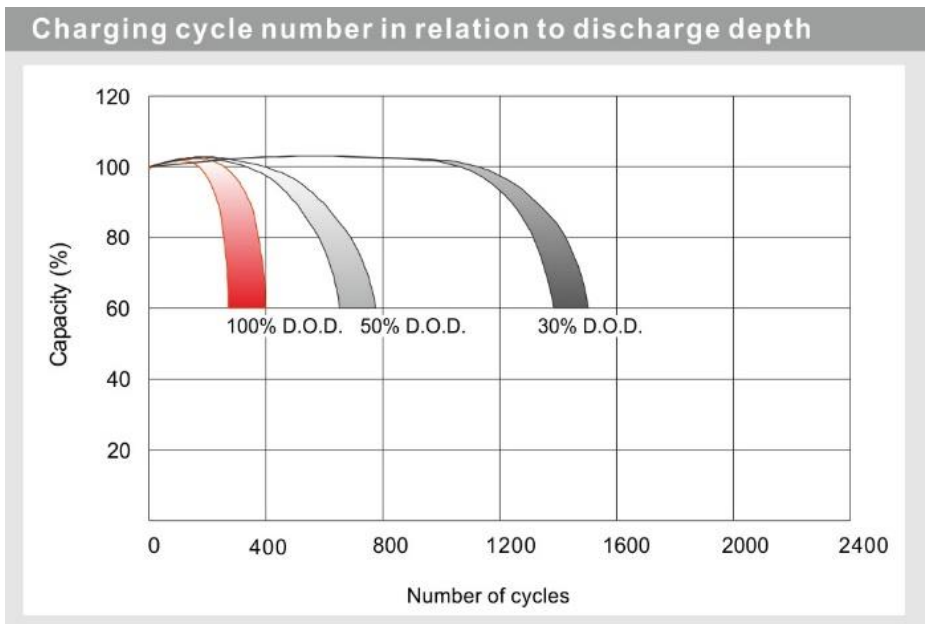

Battery Charging


The battery charger can be made in individual trays, in bigger racks or with solar panels.



Electrical Characteristics

Battery Monitoring & Charging:

The battery status is constantly monitored and a set of four LEDs gives a permanent indication.

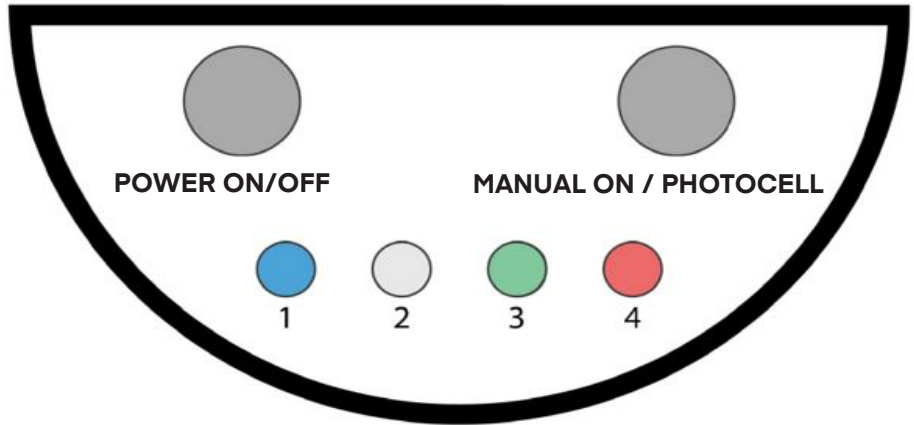

Power ON/OFF - pressing the button to disconnect the battery


MANUAL ON /PHOTOCCELL - pressing the button to set 100% brightness or to connect the photocell.

Mechanical Characteristics

Width: 236.5 mm

Total height: 245 mm


Weight: 5.9 kg

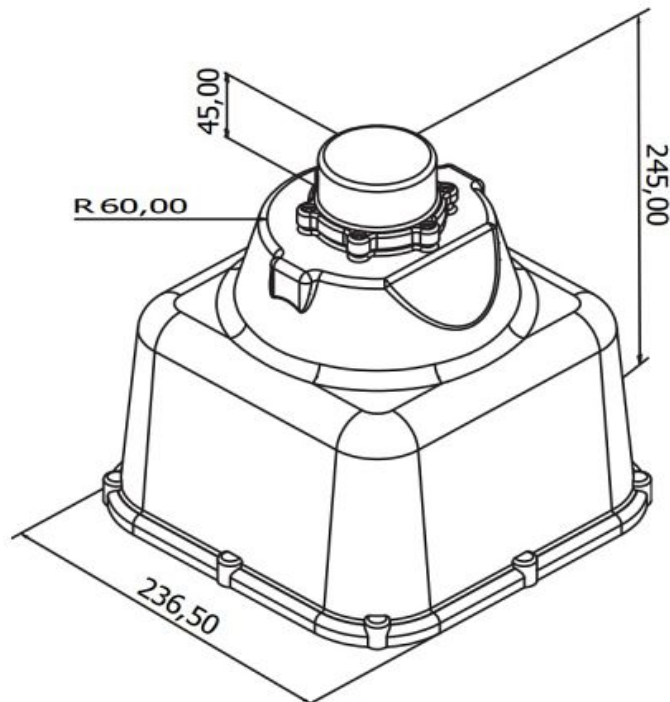


Photometric Characteristics

POLARIS - Unserviceability Light

Vertical elevation angle	0°	6°	10°	20°	30°	40°	50°
Measured minimum intensity [cd]	9.14	26.8	27.3	15.9	3.76	3.00	4.65

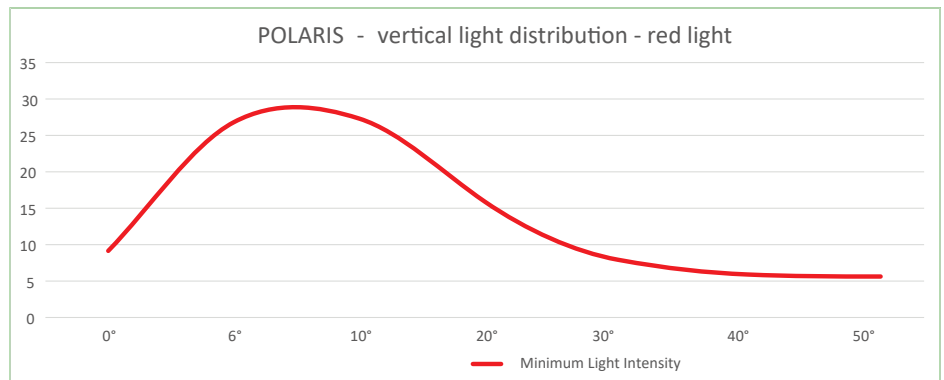

The light colour emitted by the light fixture is red, with the trichromatic coordinates:

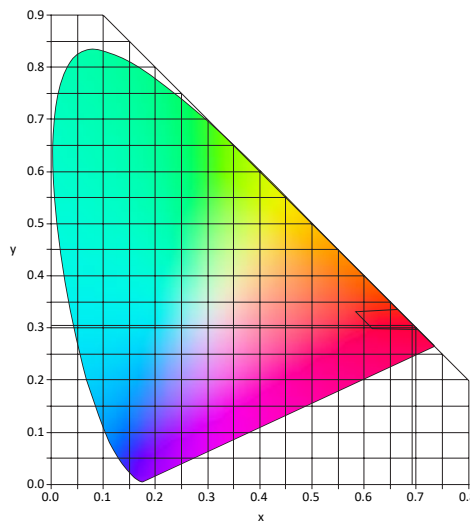





x=0,698
y=0,302
z=0,000

The measured trichromatic coordinates correspond to colour range requirements in:

ICAO Annex 14 - Aerodromes Vol.1, fig. A1-1-1b. Colours for aeronautical ground lights (solid state lighting)

Accessory

To order accessories please call our customer support.
For contact details please refer to our website.

1	Polaris Solar panel stand	AL-123-AX	
2	Polaris base plate	AL-124-AX	
3	Individual charger	AL-125-AX	
4	Charging rack	AL-126-AX	

als



Airfield Lighting Systems UK Ltd

Aviation House, Russell Gardens, Wickford, Essex, SS11 8BF, UK

www.airfieldlightingsystems.co.uk

sales@alsukltd.co.uk

Phone +44 (0)1702 547562